


VECTOR OPTICS®

FRENZY

RED DOT SIGHT USER MANUAL

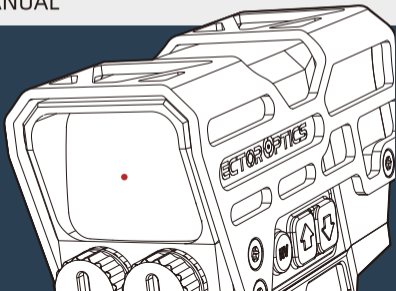

FRENZY PLUS

READ IT BEFORE USE!!!

READ AND UNDERSTAND THE CONTENTS OF YOUR FIREARM'S AND SCOPE MANUAL. FOLLOW ALL STANDARD SAFETY PRECAUTIONS AND PROCEDURES DURING FIREARM OPERATION.

▼ *Scan the QR code to learn more about VectorOptics*



VECTOROPTICS



USER MANUAL



FACEBOOK



INSTAGRAM





*NEVER LOOK AT THE SUN THROUGH THE RED DOT SIGHT (OR ANY OTHER OPTICAL INSTRUMENT).
IT MAY PERMANENTLY DAMAGE YOUR EYES.*

MAKE SURE FIREARMS ARE UNLOADED AND POINTED IN THE SAFE DIRECTION.

CONTENTS

MOUNTING	4
ZEROING	5
TURNING ON & ILLUMINATION ADJUSTMENT	6
BATTERY EXCHANGE	9
MAINTENANCE	10
STORAGE	10
RETICLE	11
WARRANTY	12
NOTES	14

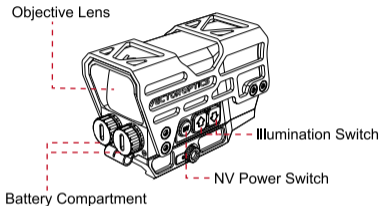

MOUNTING

The scope comes with quick detach Picatinny mount. For quick and easy installation of the red dot, please follow these steps:

- Release the quick detach lever to loosen the mount. Selecting a mounting location suitable for shooting. Place the scope objective lens towards the muzzle. Set the scope flat on top of the rail base.
- Make sure the cross bolt is located in a recoil groove. For safety reasons, allow at least 3 inches of clearance between the scope and your eyes.
- After the scope is in place, securely flip back the quick detach lever. If the mount is too loose or tight, adjust the mount nut on the other side.

ZEROING

The scope features elevation and windage adjustments. Referring to the point of impact you will need to adjust both windage and elevation screws. The elevation for vertical adjustment, and the windage for horizontal adjustment, are located on the right side of this sight.

With the scope mounted aim at a target 100 yards away. Slowly shoot a small 3 to 5-round test group onto your target.

Adjust windage & elevation screws in the direction you want to move the bullet impact. Should your impacts be below your point of aim, dial UP to reach zero.

Should your impacts be left to your point of aim, dial R (right) to reach zero. Each adjustment moves the point of impact. Shoot another 3 to 5 round test group.

Repeat until you are satisfied with the point of aim.

TURNING ON & ILLUMINATION ADJUSTMENT

The scope is activated by pressing any button on the scope. 9 levels of visible dot & 2 NV dots. This scope has Three buttons. Press the '↑' button to switch it on. Use the '↑' button to increase the dot intensity and the '↓' button to decrease it. Press and hold the '↓' switch for more than 2 seconds to turn the scope off.

When the red dot is illuminated, press the 'NV' button to activate night vision mode. The brightness level will be the same as the last time you used this mode. To exit night vision mode, press and hold the 'NV' button for 2 seconds again. The brightness will return to the level it was before night vision mode was activated.


Motion Sensor illumination (MOS) : If the scope comes with this feature, it will power off when it is at rest after 30 minutes and power on when it senses any motion. (To activate the motion sensor, press any button to turn on the red dot sight first).

Solar Power Engaged (If applicable) : It allows the red dot scope to continue to power on when the battery fails.

This scope does not have an automatic shutdown function. Press the '↓' button for 2 seconds to turn it off, after which it will automatically switch to solar mode. If the red dot is stationary for 3 minutes, it will enter sleep mode and switch to solar mode. When the battery is exhausted or absent, the red dot will automatically switch to solar mode, and any button will be invalid. After replacing the battery and turning on the power, the brightness will revert to the previously used level.

BATTERY EXCHANGE

The red dot scope is powered by 2 pieces of the AAA button batteries. When the dot becomes dim or fails to turn on, you need to replace the batteries. To do this, rotate the batteries cover located at the objective lens end. Replace the old batteries with two new ones, then reassemble the scope.



WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause internal chemical burns in as little as 2 hours.
- Keep new and used batteries out of reach of children.
- Seek immediate medical attention if a battery is suspected to be swallowed or inserted inside any part of the body.
- Battery misuse or abuse may result in leakage, fire or explosion.



MAINTENANCE

Your red dot sight, though amazingly tough, is a precision instrument that deserves reasonable cautious care.


- When cleaning the lens, first blow away any dirt and dust, or use a soft lens brush. Fingerprints and lubricants can be wiped off with lens tissue, or soft cleancotton cloth, moistened with lens cleaning fluid.
- All moving parts of the red dot sight are permanently lubricated. Do not try to lubricate them.
- No maintenance is needed on the red dot sight's outer surface, except to occasion- ally wipe off dirt or fingerprints with a soft cloth.
- Use lens covers whenever convenient.

STORAGE

Avoid storing the red dot sight in hot places, such as the passenger compartments of vehicles on hot days. The high temperatures could adversely affect the lubricants and sealants. A vehicle's trunk, a gun cabinet, or a closet is preferable. Never leave the red dot sight where direct sunlight can enter either the objective lens. Damage may result from the concentration (burning glass effect) of the sun's rays.

RETICLE PATTERN

Multi Reticle (If applicable)



Press and hold the '**↑**' button for 2 seconds, and the center red dot begins to blink. After blinking 10 times, press the '**↑**' button again to browse through the reticle patterns. To confirm your selection, press the '**↑**' button for another 2 seconds. After replacing the battery and turning on the power, the reticle will revert to the previously used one.

VECTOR OPTICS TAILED VIP LIFETIME WARRANTY

Your VectorOptics Continental, Taurus, Paragon, Scrapper, and Frenzy line products are covered by our T-VIP lifetime warranty. We will, at our option, either repair or replace your VectorOptics product without any cost if it is damaged or defective. If we can't repair your damaged product, we will replace it with a brand new one in perfect condition. We proudly stand behind our products. You have our word that we will do what it takes to retain your business as a satisfied customer. You can count on our T-VIP lifetime warranty.

- Unlimited full lifetime warranty.
- Reply to you in 1 working day.
- Free repair or replacement.
- Fully transferable.
- No invoice or receipt is needed.
- No question asked, however, we do appreciate your feedback.
- We pay for shipping back to you.

This warranty does not cover product loss, theft, deliberate damage, abuse, misapplication, or modification. This warranty does not apply to electronic components or batteries.

For warranty service please contact our Customer Service Department online at service@vectoroptics.com for return instructions. If you need to return the product, please ensure the shipment and keep the tracking records.

We can not be responsible for your product until it has been received by our Customer Service Department. For products not directly purchased from us, please contact the local dealer for applicable warranty info.

Any warranty must be registered and complete warranty terms by the link:

warranty.vectoroptics.com

We thank you for your business. Be Safe and Have Fun!



NOTES

NOTES

FRENZY

RED DOT SIGHT

Manual # Frenzy Series

2024051301



🌐: www.vectoroptics.com

@vector_optics